


REMOVABLE WATER TANK

When the water tank is full, with approximately 500ml of water collected, the unit will automatically switched off and the "Red" LED will come on.



To remove the water tank, first switch off the mini dehumidifier, press "On/Off" button to the "Off" position. Then, remove the water tank from the unit and pour the water out to the toilet or bathroom. Put the water tank back into the unit. To continue dehumidifying, press the "On/Off" button to "On" position again.

CLEANING

Before cleaning the unit, turn off the mini dehumidifier and unplug the AC plug the main socket first. Use a soft cloth to clean the surface of the unit and a soft bristled brush to remove dust from the air inlet and outlet grills.

CAUTIONS

1. After having finished using the mini dehumidifier, the user should switch the unit off by pressing the "On/Off" button to "Off" position.
2. Avoid using the AC/DC power adaptor in wet or damp place, and position it in areas where the air ventilation is good.
3. Keep the front inlet grill and the top outlet grill clear at all times and do not cover with clothing or poly bags etc.
4. The AC/DC Power adaptor will get warm during use. This is normal and does not mean there is a fault.
5. Always keep the unit at an up-right position to avoid water leakage.

WARRANTY: The warranty is valid for 1 year for a "manufacturing fault".
To benefit from the warranty, please return the device to your dealer with POSTAGE PAID along with the document of purchase proof specifying the date of purchase.

Discarding worn household devices

The European directive 2002/96/EC pertaining to electrical and electronic waste prohibits such household goods from being discarded with local refuse services. Worn devices must be collected separately to optimize the recovery and recycling rates of the components therein to reduce detrimental effects on the environment and on human health.

The "crossed out rubbish bin" symbol is affixed to all products as a reminder to respect the waste regulations.

Mini Dehumidifier

INSTRUCTION MANUAL

MINY 300




WinEurope France

Internet : www.purline.com



KEEP THESE INSTRUCTION FOR FUTURE REFERENCE

NAMES AND FUNCTION OF PARTS

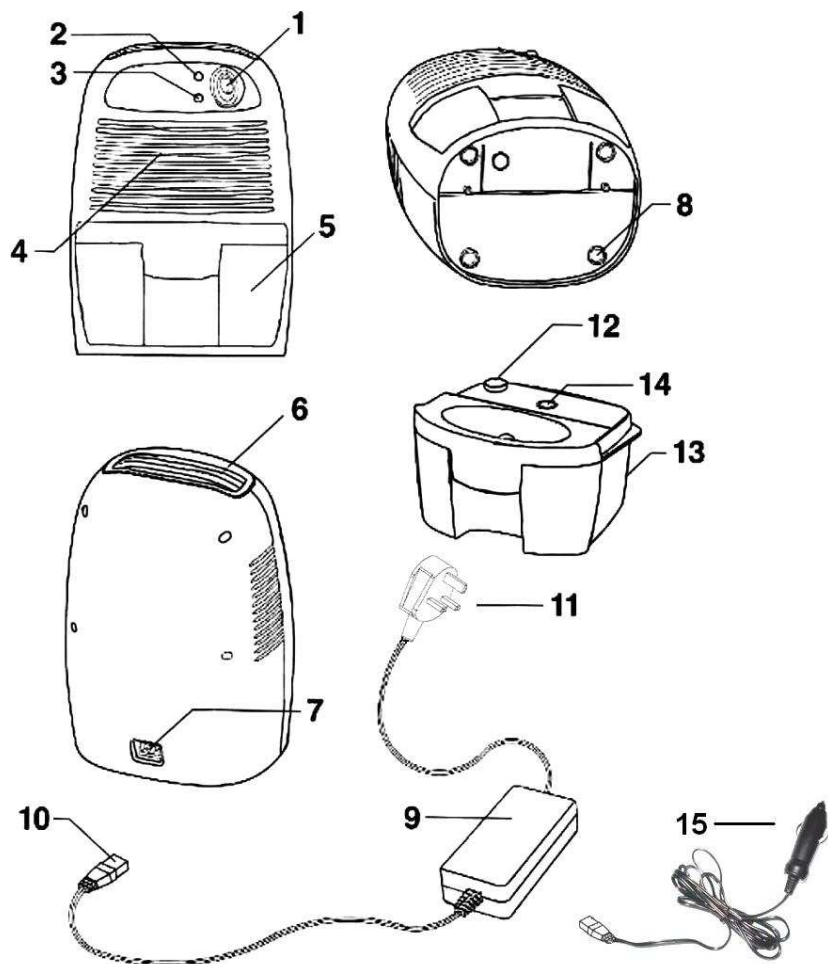

- | | | |
|---------------------|-----------------------------|------------------------------------|
| 1. On/Off button | 2. "On" yellow LED | 3. "Full" red LED |
| 4. Air inlet | 5. Removable water tank | 6. Dry air outlet |
| 7. DC Power socket. | 8. Rubber feet | 9. AC/DC power adaptor |
| 10. DC power jack | 11. AC plug with power cord | 12. Water displacement hole |
| 13. Water tank. | 14. Hydraulic Cut-off | 15. 12V car cigarette lighter plug |

FEATURES

The mini dehumidifier uses Peltier technology (no compressor), which makes it light and quiet. It is perfect for small rooms. Poor ventilation causes musty odour and fungus in wardrobes, larder, cabinet or storage room...etc. The mini dehumidifier eliminates this problem by keeping them free of unwanted moisture.

- ◆ To avoid electric shock. Do not open. There are no user serviceable parts inside.
- ◆ Specifications are subject to change for improvement without prior notice.

SPECIFICATIONS

Capacity : Approximately 250ml per day at 30°C , 80% Relative Humidity

Cooling element : Thermo-electric Peltier module

Fan : 80mm*80mm DC Brushless motor

Power adaptor : 12V DC 5A

Power consumption : 60W

Removable water tank : 500ml

Water level detector : Automatically change Yellow LED to Red LED indicator when water tank is full

Product dimension : 154mm (W) * 218mm (H) * 130mm (D)

Working environment : Over 15°C, over 40% Relative Humidity

CONNECTION

1. After removing the packaging materials, there should be 3 items:
 - a. Mini Dehumidifier
 - b. AC/DC Power Adaptor
 - c. 12V Car Cigarette Lighter Plug with 6.3 A Fuse
2. Plug the DC power jack of AC/DC power adaptor to the DC power socket, then connect the AC plug of the AC/DC power adaptor to the appropriate main socket.
3. Press the "On/Off" button to "On" position, the mini dehumidifier will begin to operate. The yellow LED will be turned on. Listen and feel for the air blowing from dry air outlet.
4. To switch off the unit, press "On/Off" button to "Off" position, the mini dehumidifier will be turned off.

